

: -10 .. 110 °C
 : 60 °C
 : 983.2 / ³
 :
 : 5.6 ³/
 : 4.6
 TF : 110
 : CE,VDE,EAC,CN ROHS,WEEE
 :
 :
 : EN-GJL-200
 : ASTM A48-200B
 : PES 30%GF
 :
 : 0 .. 40 °C
 : 10
 : G 2"
 : PN10
 : 180
 :
 : -P1: 9 .. 134
 : 50 Hz
 : 1 x 230
 : 0.09 .. 1.19 A
 (IEC 34-5): X4D
 (IEC 85): F
 :
 : (EEI): 0.18
 : 13.2
 : 14
 : 0.053 ³
 Norwegian NRF no.: 9042344
 C : DE
 : 8413703000

MAGNA3 D 32-80
 EAN : 97924451
 5710626495290
 TF : 5.6 ^{3/}
 4.6
 80
 110
 CE, VDE, EAC, CN
 ROHS, WEEE
 D

EN-GJL-200
 ASTM A48-200B
 PES 30%GF

0 .. 40 °C

10
 G 2"
 PN10
 180

-10 .. 110 °C

60 °C

983.2 / ³

-P1: 9 .. 134

50 Hz

1 x 230

0.09 .. 1.19 A

(IEC 34-5): X4D

(IEC 85): F

(EEI): 0.18

13.2




14

0.053 ³

Norwegian NRF no.: 9042344

C : DE

8413703000

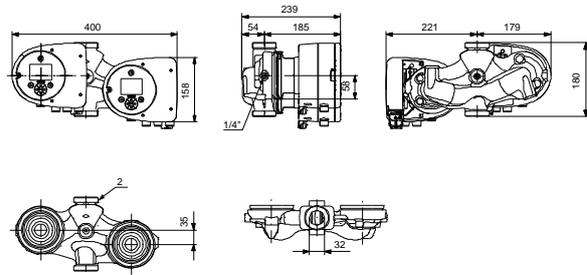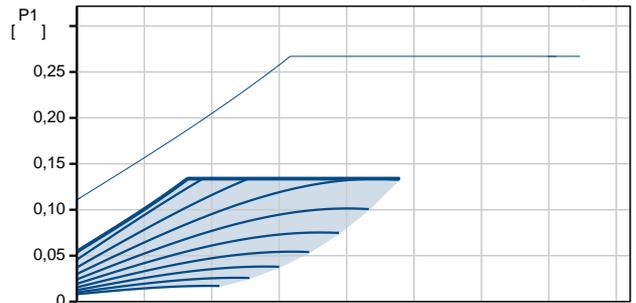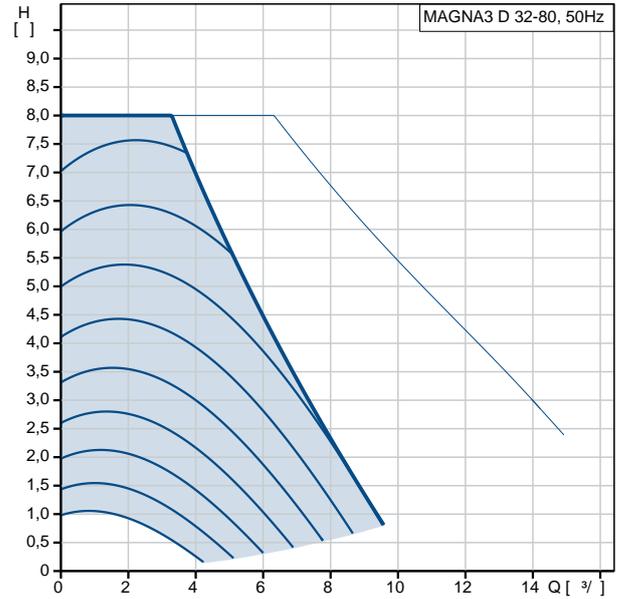

Example of mains-connected motor with mains switch, backup fuse and additional protection

