

1 UPS 25-100 180



: 95906480

3-

*
*
*
*
*
*

, PES/PP.

1-

: -25 .. 110 °C
: 60 °C
: 983.2 / 3

TF : 110
: CE

EN-JL1030
ASTM 30 B
, PES/PP

.T : - 80 OC: 40 °C

: 10
: G 1 1/2
: PN 10
: 180



:
1: 280
2: 340

: 345
: 50 Hz
: 1 x 230

1: 1.3 A
2: 1.5 A

3: 1.52 A

UPS 25-100 180	95906480
EAN	5700311099766
TF	3
	100
	110
	CE
	EN-JL1030
	ASTM 30 B
	, PES/PP
80 OC:	40 °C
	10
	G 1 1/2
	PN 10
	180
	-25 .. 110 °C
	60 °C
	983.2 / ³
	1: 280
	2: 340
	345
	50 Hz
	1 x 230
	1: 1.3 A
	2: 1.5 A
3:	1.52 A
	9.5
(IEC 34-5):	X4D
(IEC 85):	H
	CONTACT
	9H
	6.3
	6.8
	0.012 ³
C	DE
	8413703000

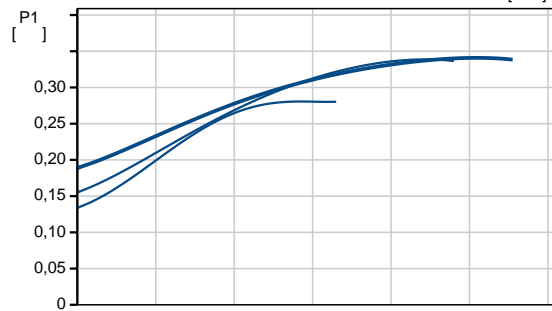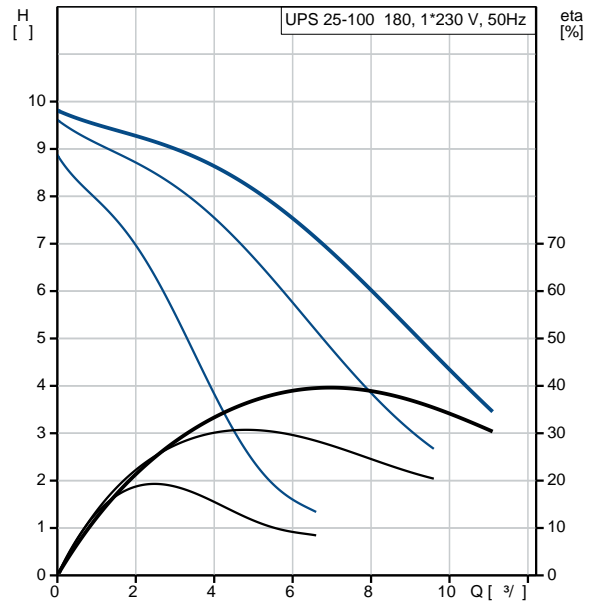

G 1 1/2

