

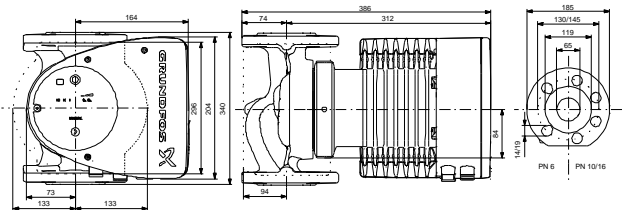


| | | |
|------------------|-------------|----------------------|
| | | MAGNA1 65-40 F |
| | | 99221382 |
| EAN | | 5712608943546 |
| | | 40 |
| TF | | 110 |
| | | CE, VDE, EAC, CN |
| | | ROHS, WEEE |
| | | C |
| | | EN-GJL-250 |
| | | ASTM A48-250B |
| | | PES 30%GF |
| | | 0 .. 40 °C |
| | | 10 |
| | | DIN |
| | | DN 65 |
| | | PN6/10 |
| | | 340 |
| | | -10 .. 110 °C |
| | | 60 °C |
| | | 983.2 / ³ |
| | -P1: | 23.15 .. 190 |
| | | 50 Hz |
| | | 1 x 230 |
| | | 0.24 .. 0.9 A |
| | (IEC 34-5): | X4D |
| | (IEC 85): | F |
| | (EEI): | 0.20 |
| | | 20.9 |
| | | 22.8 |
| | | 0.057 ³ |
| | | D |
| Finnish LVI No.: | | 4615217 |
| C | | DE |
| | | 8413703000 |

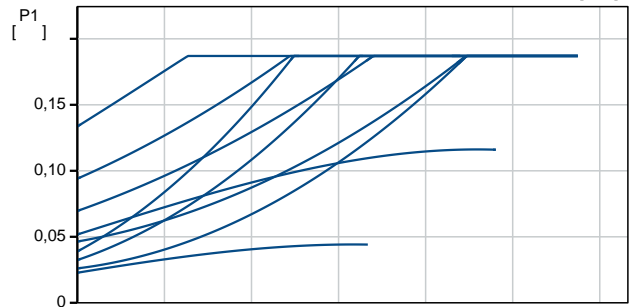

Example of mains-connected motor with mains switch, backup fuse and additional protection

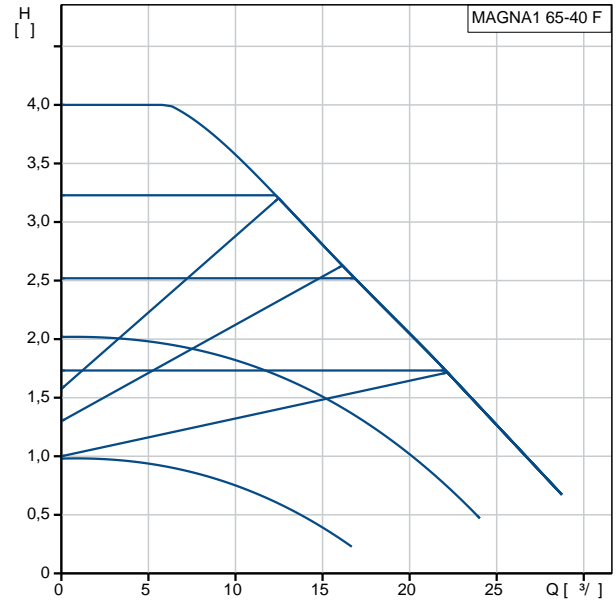